

POWERSTAR PSG-25SL / TL

25kW(50Hz)

1500RPM Golden Series

Generator Specifications

| | |
|------------|---------------------------|
| Output | 25 kW |
| Voltage | 230 V / 400V |
| Phase | Single-phase/ Three-phase |
| Weight | 516kg |
| Frequency | 50 Hz |
| Revolution | 1500 rpm |
| Dimension | 1520*670*815mm |



Alternator Specifications


| | |
|-----------|----------------|
| Frequency | 50 Hz |
| Voltage | 230 V / 400v |
| Power | 25 kVA / 31kVA |

Diesel Engine Specifications


| | |
|------------|--------------|
| Output | 36kW |
| Revolution | 1500 rpm |
| Cylinder | 4 |
| Aspiration | Self-priming |
| Bore | 87mm |
| Stroke | 103mm |
| Weight | 210 kg |

Controller Specifications

| | |
|-------------------|---------------------------------------|
| Working Voltage | 8.0V-35.0V DC Continuous power supply |
| Power Consumption | < 3W(Standby ≤ 2W) |
| Overall Dimension | 135mm*110mm*44mm |
| Installation | 116mm*90mm |




POWERSTAR PSG-25SL / TL 25kW(50Hz)

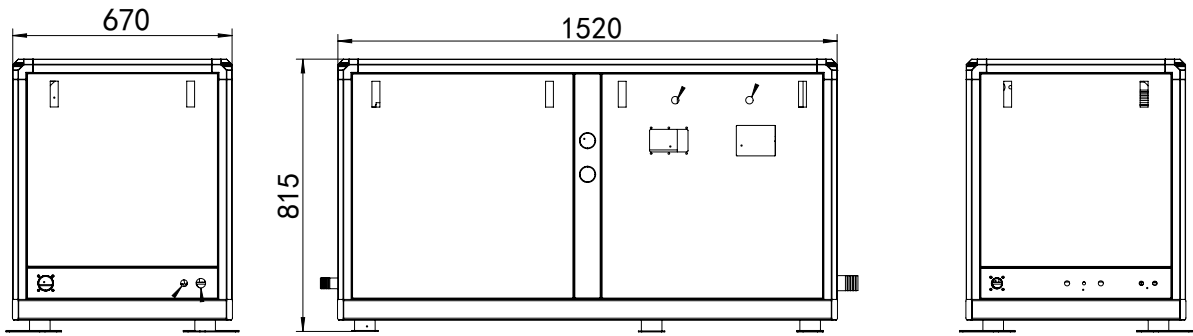

Installation Dimension

| | |
|---------------------|-----|
| Exhaust Pipe mm | 45 |
| Water Inlet Pipe mm | 20 |
| Oil Inlet Pipe mm | 8 |
| Oil Return Pipe mm | 8 |
| Battery Capacity AH | 100 |

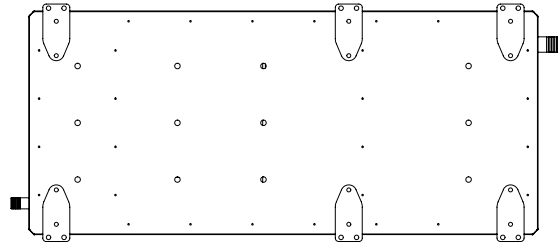

Standard Configuration



- Remote Panel
- 15m Remote Cable
- Sea Water Filter
- Generator Self-protection Shutdown: High water temperature, low oil pressure, high speed
- Oil Water Separator
- Water Intake
- Muffler